

DIO Indoor SunSensors




Specification

Material	Sensors	Addition (dpt)	0.75~3.50
Refractive Index	1.555	Base curve	0.5~8BC
Gravity	1.17	Max Diameters (mm)	70
Abbe Value	38	Fitting Height (mm)	14/16/18
UV cut off (nm)	370	Available Corridor length (mm)	9/11/13
Color	Grey/Brown	ID Mark	INS


Lens Features

- Specially tailored indoor progressive lens
- Distortion free room distance clear vision from 0.4m to 2m
- Wider intermediate & near vision
- For all indoor activities (Meeting, computing, painting, reading)
- Order just as normal progressive lenses
- (DIO design software will convert power to be produced)

Power Chart

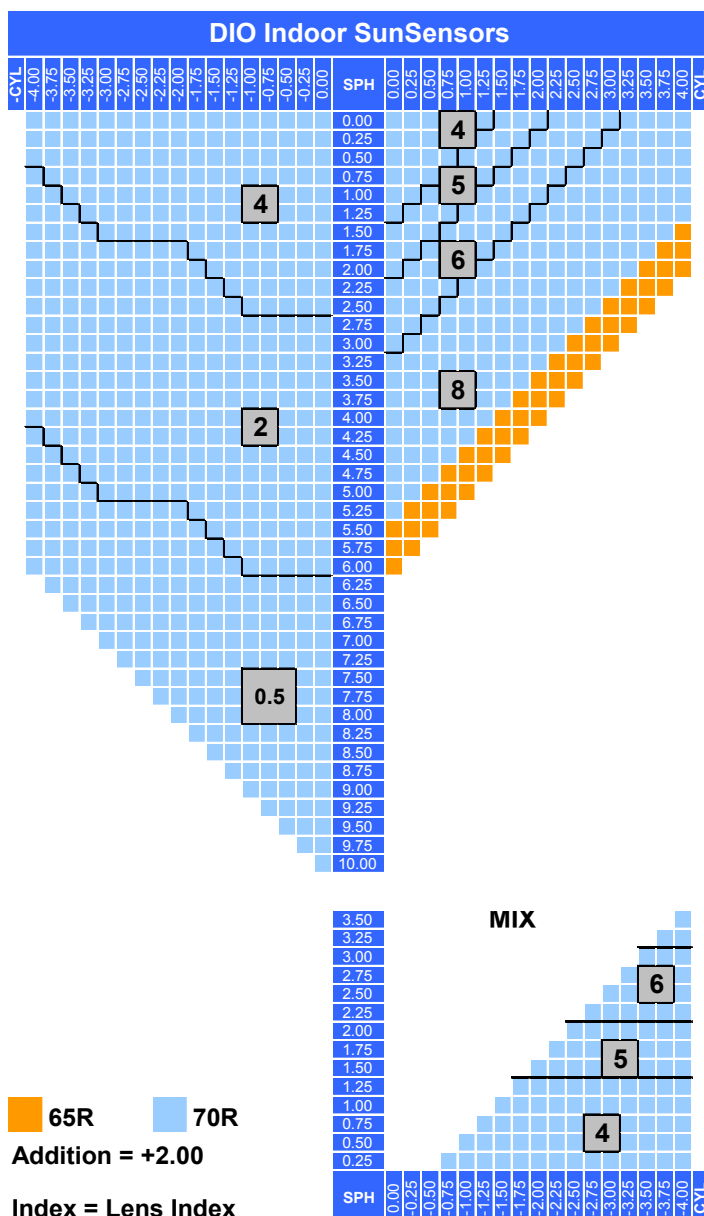

Lens Marking Layout

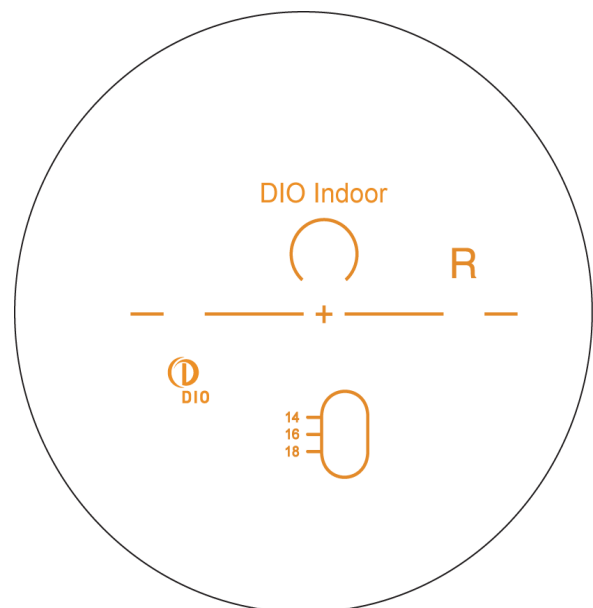

Add-on Features

- Precal
- Remote Edging
- Special thickness
- Rx compensation
- Decentration
- Hi cylinder (4-6)
- Prism ($\leq 4 \Delta$)
- Mirror coating

※ When your prescription is over of range, please contact us directly.